

# STRAPPING SOLUTIONS

SAFE · RELIABLE · EFFICIENT



[www.rpm.com.my](http://www.rpm.com.my)



+603-3342 8635

+6012-377 8635



# Steel Strapping



STEEL STRAPPING SIZES		BREAKING STRENGTH	LENGTH
Width (mm)	Thickness (mm)	(N)	Per KG (m)
16	0.6	7,700	13.3
19	0.55	8,800	12.2
19	0.6	9,200	11.2
19	0.7	11,000	9.4
32	0.8	19,100	5.0

Note: \*Available in Blue Tempered or Green Painted \*Other sizes available upon request.

## Tools & Accessories for Steel Strapping

### 01 Combination Sealless Strapping Tool



Weight	3.6kg
Joint	Sealless Joint
Max Tension	Up to approx 6,000N
Strap Thickness	0.4mm - 0.6mm
Strap Width	13mm, 16mm, 19mm

**BEST SELLER**

**ACROLEAGUE**

### 02 Combination Sealless Strapping Tool - Heavy Duty



Weight	4.2kg
Joint	Sealless Joint
Max Tension	Up to approx 8,000N
Strap Thickness	0.55mm - 0.75mm
Strap Width	16mm, 19mm

**BEST SELLER**

**ACROLEAGUE**

### 03 Titan Combination Strapping Tool



### 04 Combination Strapping Tool - Push Type



### 05 Pneumatic Sealer & Tensioner (Split Type)



### 06 Pneumatic Strapping Tool



### 07 Steel Strapping Sealer



### 08 Steel Strapping Tensioner



### 09 Steel Strapping Cutter



### 10 Dispenser



### 11 Seals



# Polyester (Pet) Strapping



## Advantages:

- Spilt Resistance (for non split grade)
- Elongation Recovery
- Safety
- Rust Resistance
- High Retained Tension
- Environmentally Friendly
- Cost Savings

PET STRAPPING SIZES		BREAKING STRENGTH	LENGTH
Width (mm)	Thickness (mm)	(N) min.	Per KG (m)
15.5	0.85	4,700	60.0
19.0	1.00	6,800	40.0
19.0	1.27	8,600	31.0
25.0	1.00	9,000	32.0

Note: \*Available in Green or Black colour \*Other sizes available upon request. \*\*\* Tolerance Length / meter +/- 5%

## Tools & Accessories for PET Strapping

## Fibre Strapping

Fibre strap is a safe alternative for steel strapping and is often referred to as "**Synthetic Steel**"

There are many advantages to this Fibre Strap

- High System Strength
- No damage or scratch on any surface
- Retensionable & torsion absorbing
- Comfortable handling , easy to push under pallets
- No risk of injury to shippers and handlers in using or opening the strapping
- No corrosion
- Weatherproof
- Small & light weight



### 12 Pneumatic Sealless Strapping Machine



Strap Width	13-19mm
Strap Thickness	0.5mm - 1.5mm
Max Tension	3,000N
Air Pressure	0.5 - 0.8 MPa
Weight	4.5kg

### 13 Dispenser



### 15 Semi-Auto Strapping Machine



### 16 Manual Tensioners (Heavy Duty & Light Duty)



### 14 Serrated Seals



### 17 Manual Sealers



# About RPM

RPM Sdn. Bhd. is a company specialising in steel and plastic strapping products for many industries including major steel and timber industries throughout Malaysia. We carry a wide range of products which consists of strapping tools, strapping bands, accessories and seals.

RPM is established in 1982 with a vision to be a one-stop solution centre for our customers. RPM has continued to deliver products of the highest strapping technology with safety, quality and reliability in mind. We are renowned for our speedy deliveries and excellent after sales service.



## HIGH QUALITY PRODUCTS

We specialise in high quality strapping products and emphasize strictly on safety and reliability of our products.




## ONE STOP SOLUTION CENTRE

We specialise on all your strapping needs including PP, PET and steel strapping. We have a wide range of strapping tools and accessories which will enhance your production effectiveness.



## CUSTOMER SUPPORT

At RPM, we take care of our customers by providing effective strapping solutions and technical repair services.

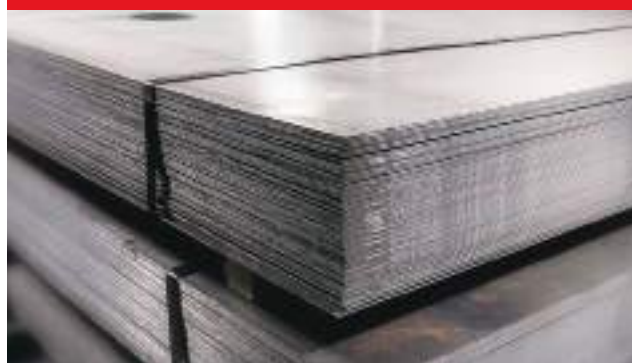

RPM SDN. BHD.  
Industrial Strapping Solution

Associate Company:



No. 75, Jalan Batai Laut 3, Kawasan 16, Taman Intan,  
41300 Klang, Selangor, Malaysia

Tel : +603-3342 8635 Sales Dept : +6012-377 8635

Fax : +603-3342 1910 Email : sales@rpm.com.my